




80' & 80'+6' STRAIGHT BOOMS




MODEL		80'	80' X-Axle	80'+6"
PLATFORM HEIGHT	IMP.	80'	80'	86'
	METRIC	24.4 M	24.4 M	26.2 M
WORKING HEIGHT	IMP.	86'	86'	92'
	METRIC	26.2 M	26.2 M	28.1 M
HEIGHT STOWED	IMP.	9' 9"	9' 7"	9' 7"
	METRIC	2.97 M	2.0 M	2.0 M
WIDTH AXLES EXTENDED	IMP.	NA	10'	10'
	METRIC	NA	3.05 M	3.05 M
WIDTH AXLES STOWED	IMP.	8' 6"	8'	8'
	METRIC	2.59 M	2.44 M	2.44 M
LENGTH STOWED	IMP.	35' 3"	33' 7"	36' 9"
	METRIC	10.7 M	10.2 M	11.2 M
WHEELBASE	IMP.	108"	120"	120"
	METRIC	2.74 M	3.05 M	3.05 M
PLATFORM SIZE	IMP.	36" X 72"	36" X 72"	36" X 72"
	METRIC	.9X 1.8 M	.9X 1.8 M	.9X 1.8 M
TURNING RADIUS (OUTSIDE)	IMP.	20' 2"	25.4'	25.4'
	METRIC	6.15 M	2.1 M	2.1 M
TAILSWING	IMP.	3' 7"	2' 11"	2' 11"
	METRIC	1.09 M	.89 M	.89 M
TRAVEL SPEED - STOWED	IMP.	3.2 MPH	3.5 MPH	3.5 MPH
	METRIC	5.1 KPH	5.6 KPH	5.6 KPH
GRADE ABILITY	IMP.	25 %	25%	25%
	METRIC	25 %	25%	25%
GROUND CLEARANCE	IMP.	14"	10"	10"
	METRIC	36 CM	27 CM	27 CM
PLATFORM CAPACITY	IMP.	500 LBS.	500 LBS.	500 LBS.
	METRIC	227 KG.	227 KG.	227 KG.
WEIGHT	IMP.	38,200 LBS.	30,600 LBS.	33,850 LBS.
	METRIC	KG.	6645 KG	6645 KG

80' Straight Boom

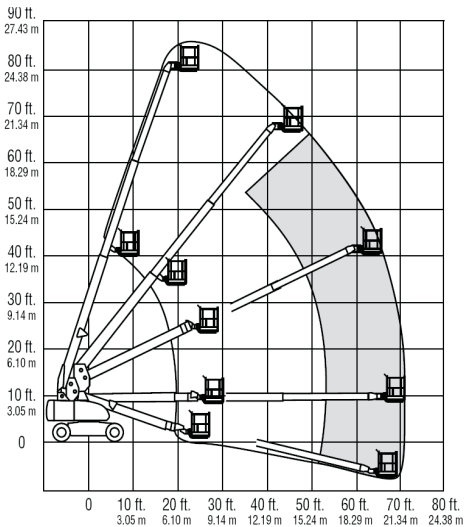

80'+6' Straight Boom

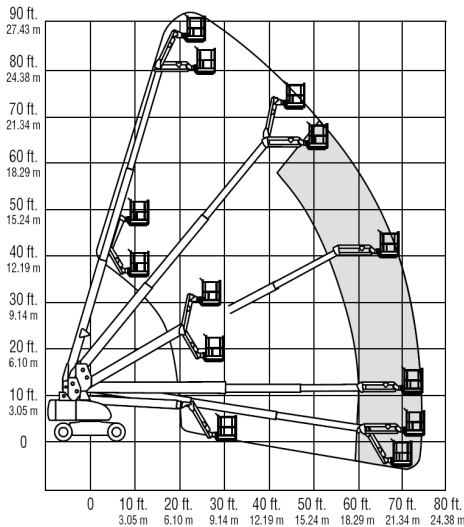

- ⚙️ Painted Flat Black
- ⚙️ Available Cable Rollers
- ⚙️ Equipped with full night light package
- ⚙️ Available Condor Mount
- ⚙️ Available underslung truss system
- ⚙️ Electrical outlet on platform
- ⚙️ Up to a 1000 lbs. capacity
- ⚙️ Ground controls

Other makes, models, and sizes available call with your specific needs.

SUBJECT TO CHANGE WITHOUT NOTICE